



# PLAN

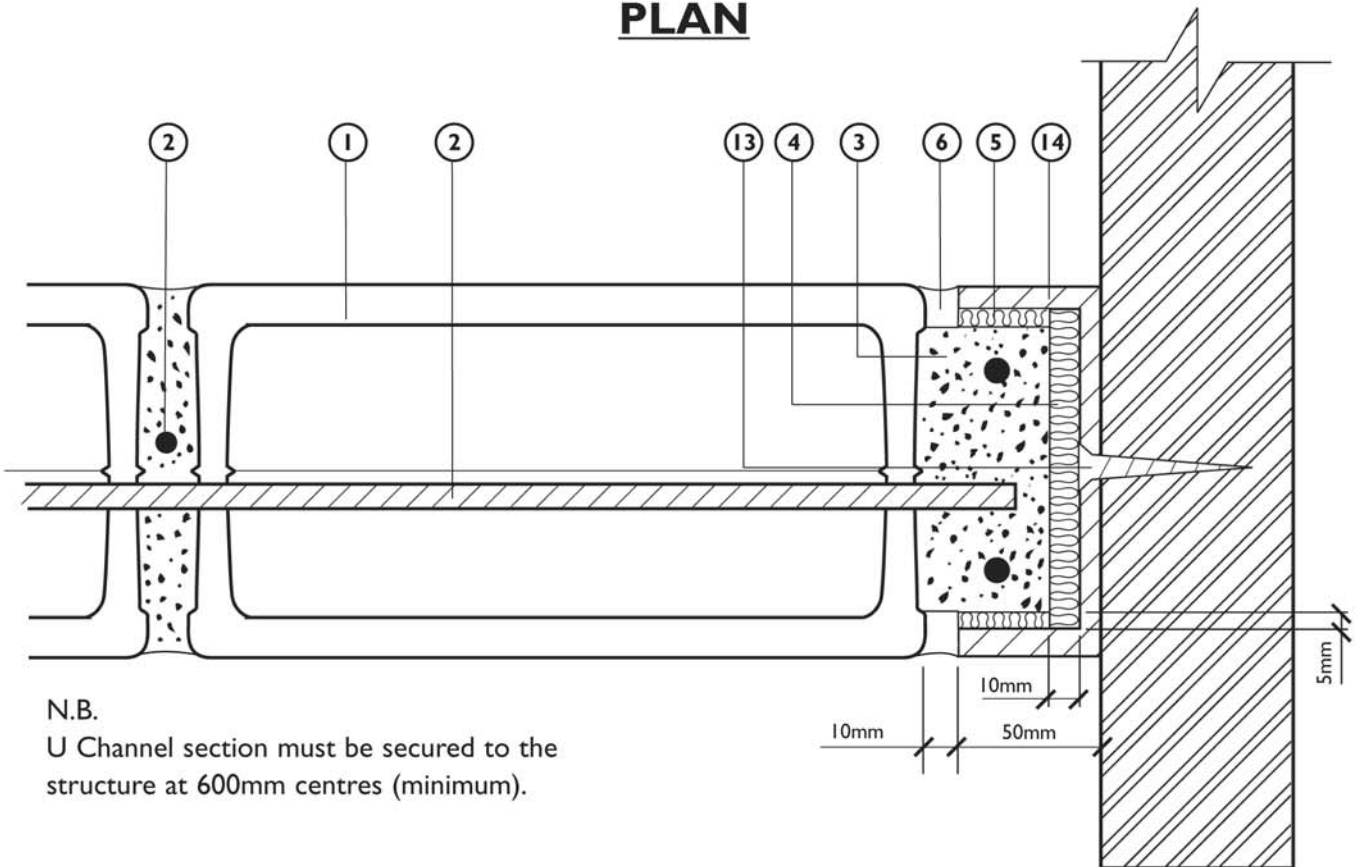

N.B.  
U Channel section must be secured to the structure at 600mm centres (minimum).

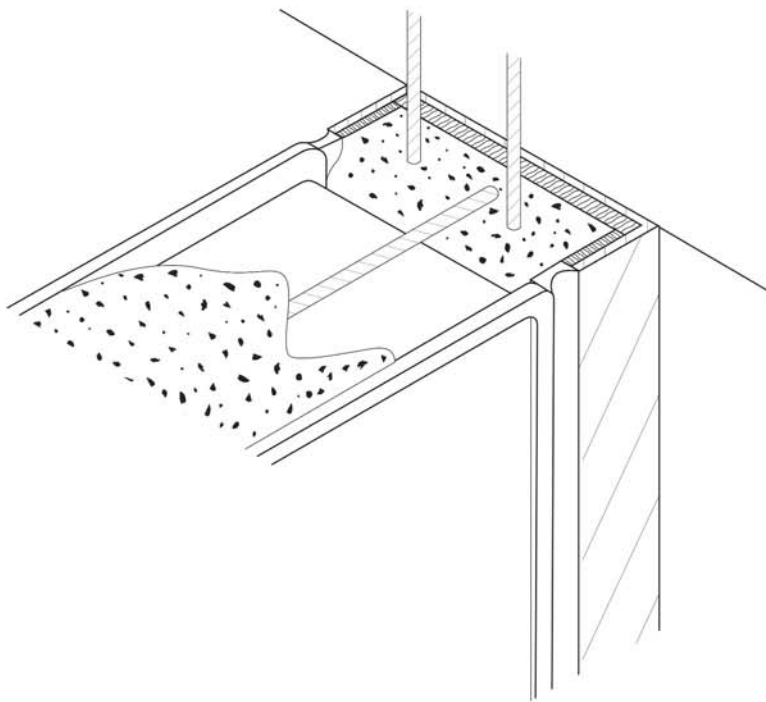

## KEY :

- ① Glass block
- ② Reinforcement Rod
- ③ Colmef Vetromix Mortar (also for grout finishing)
- ④ 10mm Expansion material
- ⑤ 5mm Expansion material
- ⑥ Silicon Sealant
- ⑬ Screw
- ⑭ U Channel (Dimension to suit specification)

DRAWING TITLE :

## MORTAR FIXING DETAIL

GLASS BLOCK TO METAL U CHANNEL, HEAD - CILL & JAMB DETAIL

### NOTES

1. Drawing not to scale. For information purposes only.

This drawing may not be reproduced or made use of unless expressly agreed by Glass Block Technology Limited.

DRAWING No.

# GBT/0003